



HC4565 - HD4565 - HS4565
L4565 - N4565 - NT4565


Flush mounted loudspeakers

Description


Flush mounted loudspeakers to be used with the AXOLUTE, LIVING, LIGHT and LIGHT TECH series. The loudspeakers must be installed inside item 506E, PB526 boxes. They do not need support and are supplied complete with all that's needed.

Technical data

Type: wide band
 Power: 6 Wrms/12 W musical
 Impedance: 16 Ω
 Frequency range: 160 - 16 kHz
 Sensitivity: 80 dB (1 W/1 m)
 Feature: loudspeaker for installation inside flush mounted boxes, item 506E, PB526

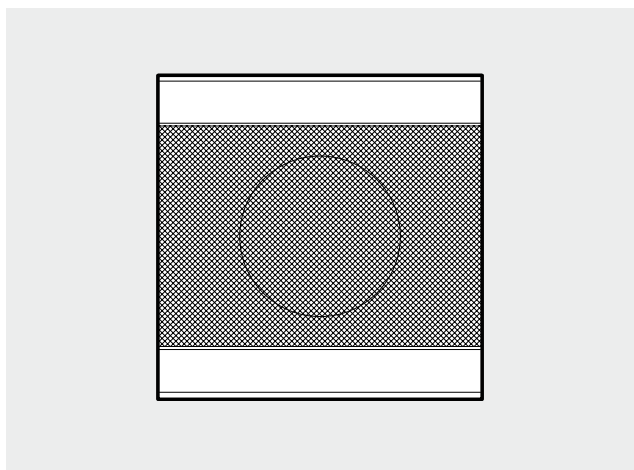

Dimensions

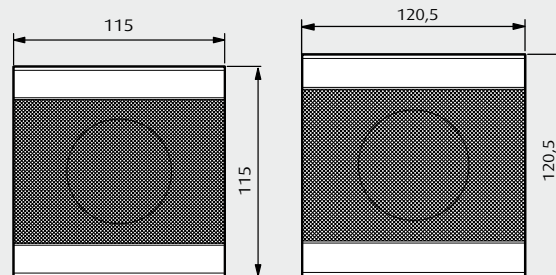

L/N/NT4565

HC/HD/HS4565