

## Flush mounted loudspeakers

067303 HC4565 HS4565 N4565  
573977 HD4565 L4565 NT4565

### Description

Flush mounted loudspeakers for flush mounted installation. No support required.

Related articles


#### flush mounted boxes:

art. 506E and art. PB526 (only for HC/HD/HS4565 and L/N/NT4565)


art. 89379 and 89279

### Technical data


Type: wide band  
Power: 6 Wrms/12 W musical  
Impedance: 16  $\Omega$   
Frequency range: 160 - 16 kHz  
Sensitivity: 80 dB (1 W/1 m)

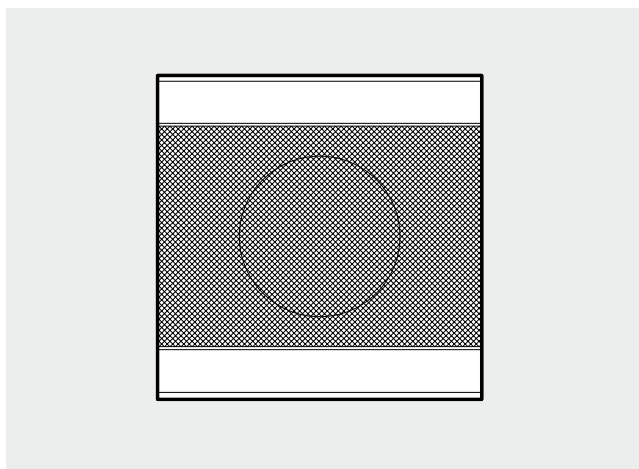


### Dimensions

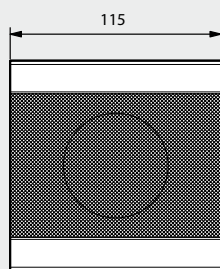

L/N/NT4565



HC/HD/HS4565

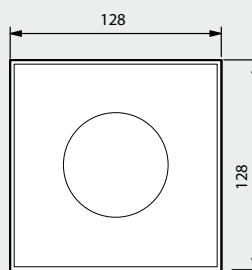

573977-067303