

**Use**

Socket outlets for: Israeli standard plugs.

**Range**

**Designation**

**Item**


Socket 2P+E 16A 250 V a.c.

- RW4183
- RG4183

Color code:

- White colour
- Black colour

**Overall dimensions (mm)**

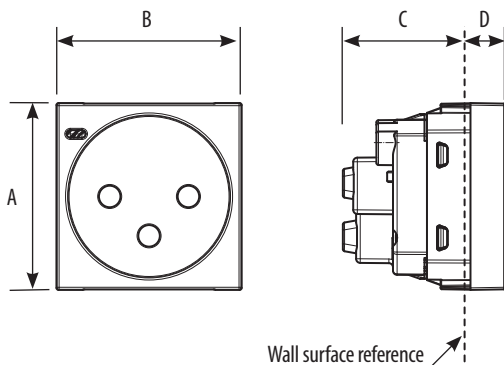

	A	B	C	D
..4183	45.1	44.7	29.5	9.8

**Connection**

- Terminal type: screw clamp
- Terminal capacity: 2 x 4 mm<sup>2</sup> max
- Stripping length: 11 mm
- Compatible with flexible or rigid cables

**Technical characteristics**

**- Protection index**  
 (considering a complete installation, including cover plate)  
 Penetration by solid bodies/liquid: IP20D

**- Mechanical characteristics**  
 Impact test: IK 04

**- Material characteristics**  
 Material:  
 Case and Key cover: PC (Polycarbonate)  
 Halogen free.

UV resistant.  
 Self-extinguishing:  
 850° C / 30 s for insulating parts holding live parts in place  
 650° C / 30 s for other parts made of insulating materials

**- Electrical characteristics**  
 Voltage: 250 VAC  
 Current: 16 A

**- Climatic characteristics**  
 Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

**Cleaning**

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

**Standards and approvals**

Compliance with standards IEC 60884-1  
 SI 32 part 1.1  
 Refer to e.catalogue.