

Connection module with additional power supply

Description

Connection module with additional power supply dedicated to the voice control KW/KG/KM8013.

Note: The devices K8001 (Connection module) and K8003 cannot coexist in the same box.

Related items

KW/KM/KG8013 Voice control

Technical data

Power supply module

Rated voltage:	110 – 240 V
Rated current:	60 mA@110V – 30 mA@240V
Operating frequency:	50 – 60 Hz
Power consumption - full load:	5 W Max.
Power consumption:	1,25 W max
Full load efficiency:	82 % typ.
Stand by power:	< 30mW
Operating temperature:	0 – 40 °C


SCS module

Power supply from BUS:	18 – 27 Vdc
Max. absorption:	5 mA


Dimensional data

Size: 2 flush mounted modules.


Wiring diagrams

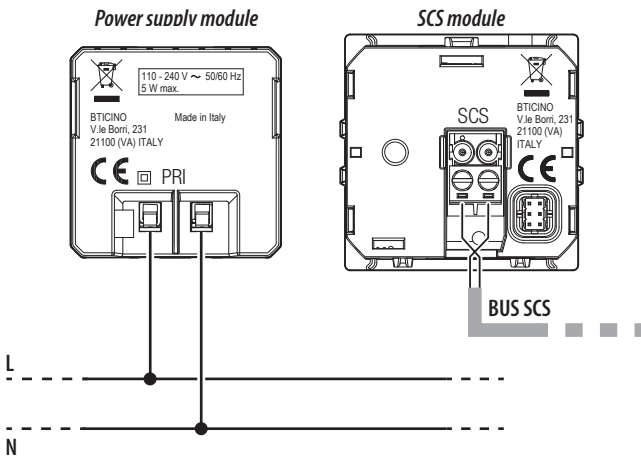


Note: SCS connection is mandatory.

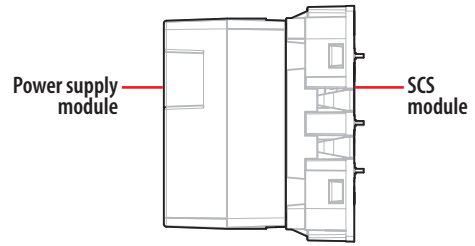

SCS module
Front view

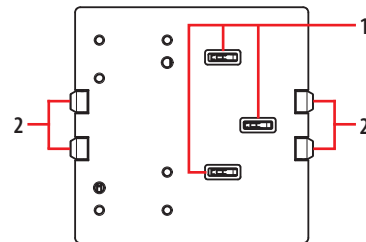


Rear view

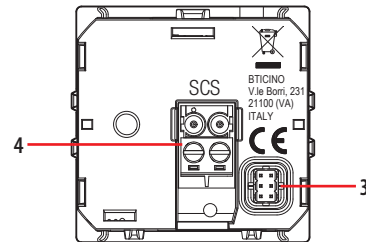


Legend

1. SCS power supply contact points for Voice control
2. SCS power supply contact points for actuators
3. Clamps for SCS connection
4. Connector for power supply module

Power supply module
Front view

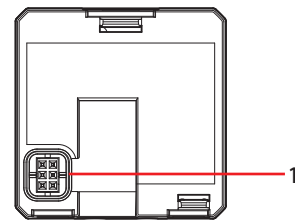

Rear view

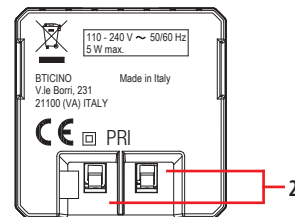

Legend

1. Connector for SCS module
2. 110 – 240V 50/60Hz power supply clamps