
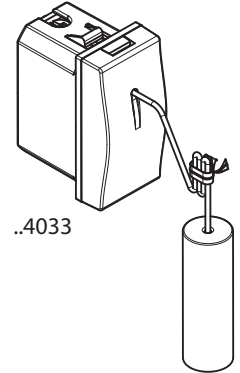





Classia - One-way switch  
 - Two-way switch  
 - Four-way switch  
 - Pushbutton  
 - Pull-cord pushbutton

RW4001 - RA4001 - RG4001 --- RW4001M2 - RA4001M2 - RG4001M2  
 RW4003 - RA4003 - RG4003 --- RW4003M2 - RA4003M2 - RG4003M2  
 RW4004 - RA4004 - RG4004 --- RW4004M2 - RA4004M2 - RG4004M2  
 RW4005 - RA4005 - RG4005 --- RW4005M2 - RA4005M2 - RG4005M2  
 RW4033 - RA4033 - RG4033



### Use

Rocker control device for lighting and other loads.


### Range

Designation	Item 1 Module	Item 2 Modules
One-way switches 1P 10AX 250 Va.c.	<input type="checkbox"/> RW4001	<input type="checkbox"/> RW4001M2
	<input type="checkbox"/> RA4001	<input type="checkbox"/> RA4001M2
	<input type="checkbox"/> RG4001	<input type="checkbox"/> RG4001M2
Two-way switches 1P 10AX 250 Va.c.	<input type="checkbox"/> RW4003	<input type="checkbox"/> RW4003M2
	<input type="checkbox"/> RA4003	<input type="checkbox"/> RA4003M2
	<input type="checkbox"/> RG4003	<input type="checkbox"/> RG4003M2
Four-way switches Intermediate 10AX 250 Va.c.	<input type="checkbox"/> RW4004	<input type="checkbox"/> RW4004M2
	<input type="checkbox"/> RA4004	<input type="checkbox"/> RA4004M2
	<input type="checkbox"/> RG4004	<input type="checkbox"/> RG4004M2
Pushbuttons 1P (NO) 10A 250 Va.c.	<input type="checkbox"/> RW4005	<input type="checkbox"/> RW4005M2
	<input type="checkbox"/> RA4005	<input type="checkbox"/> RA4005M2
	<input type="checkbox"/> RG4005	<input type="checkbox"/> RG4005M2
Pushbuttons with cord-pull 1P (NO) 10A 250 Va.c.	<input type="checkbox"/> RW4033	
	<input type="checkbox"/> RA4033	
	<input type="checkbox"/> RG4033	

Color code:

White colour     Aluminum colour     Black colour

### Overall dimensions (mm)

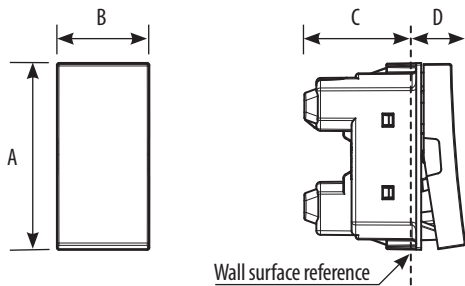

..4001 ..4003 ..4005	A	B	C	D
1 Module	45.1	22.3	27	11.9
2 Modules	45.1	44.7	27	11.9
..4004	A	B	C	D
1 Module	45.1	22.3	28.1	11.9
2 Modules	45.1	44.7	28.1	11.9
..4033	A	B	C	D
1 Module	45.1	22.3	23.9	12.8

### Connection

Terminal type: screw clamp  
 Terminal capacity: 2 x 4 mm<sup>2</sup> max  
 Stripping length: 9 mm  
 Compatible with flexible or rigid cables

### Technical characteristics

- **Protection index**  
 (considering a complete installation, including cover plate)  
 Penetration by solid bodies/liquid: IP40
- **Mechanical characteristics**  
 Impact test: IK 04
- **Material characteristics**  
 Material:  
 Case: PC (Polycarbonate)  
 Key cover: ABS - ABS/PC  
 UV resistant.
- Self-extinguishing:  
 850° C / 30 s for insulating parts holding live parts in place  
 650° C / 30 s for other parts made of insulating materials
- **Electrical characteristics**  
 Voltage: 250 V a.c.  
 Current: 10AX for ..4001../..4003../..4004..  
 Current: 10A for ..4005../..4033..
- **Climatic characteristics**  
 Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

### Cleaning

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution: Always test before using special cleaning products.**

### Standards and approvals

Compliance with standards IEC/EN 60669-1.  
 Refer to e.catalogue.