


BTICINO > Smart Home solutions > My Home - Home automation system > Light and shutter automation > Recessed actuators

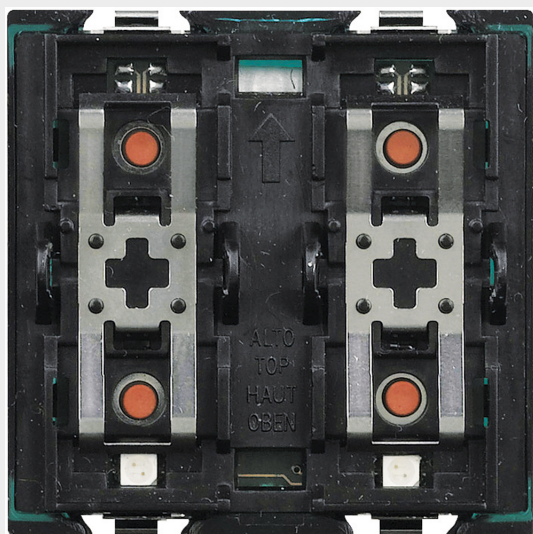

## AM5861M2

Flush mounted actuator with 2 internal relays and 4 pushbuttons, conceived for use with control devices H4660M2, for the management of shutters. In addition to the UP/DOWN monostable and bistable functions, the actuator can also move the shutter to a saved position (PRESET) - 2 modules.

### Technical features

Brand	BTicino
Rated voltage	27Vdc
Rated current	16mA
Rated power W	500W
N° of modules	2
Series	MyHome

### Documentation

 [Technical Data Sheet](#)

 [Technical Data Sheet](#)

## Related products



### AM5860M2

Command two modules  
built with low 3 buttons  
and 3 two-color LED  
made ??for work ONLY  
in combination...

We, BTicino S.p.A Viale Borri 231 21100 Varese (Italy), declare that all items listed in BTicino catalogues, have been manufactured in compliance with the principal elements of safety objectives of European Directive said LVD: 2014/35/EU: 26 February 2014 and, where requested, also in compliance with essential protection requirements of electromagnetic compatibility according to European Directive 2014/30/EU: 26 February 2014, and/or where requested also in compliance with 1995/5/CE: 9 March 1999 "R&TTE" or where requested also in compliance with 2014/53/EU: 16 April 2014 "RED". BTicino S.p.A. products are in compliance with the standard published by the International Electrotechnical Commission (IEC). The compliance can be proved by Certificates issued by organizations recognized by IEC according to the CB-scheme. Our items comply with relevant European Product- Standards and show, whether provided, CE marking, they have been constructed in accordance with good engineering practice in safety matters in force in the Community, they do not endanger the safety of persons, domestic animals or property when properly installed and maintained and used in applications for which they were made.

Source page: <https://catalogue.bticino.com/BTI-AM5861M2-EN>