


BTICINO > Wiring devices > My Home > Light and Shutter automation







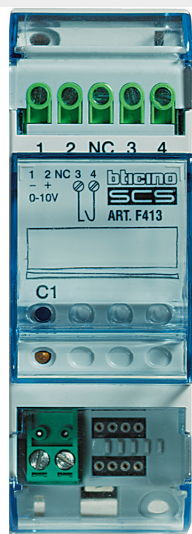

F413N

1 output dimmer for the powering of fluorescent lamps or LED sources with 1 to 10 V input for single loads up to 2.5 A at 230 Vac - screw connection - 27 Vdc power supply - absorption 30 mA - possibility of connecting up to 10 ballasts (clamps 1-2) - with direct load control pushbutton - DIN rail mounted version - 2 modules

Technical features

N° of modules	2
Rated power W	460W
Rated voltage	27Vdc
Rated current	0,030A
Series	MyHome

Documentation

-  [Scheda Tecnica](#)
-  [Instructions Sheet](#)
-  [DWG drawing](#)
-  [Technical guide](#)
-  [My Home guidelines](#)
-  [Living Now english catalogue](#)

Certificazioni

