


BTICINO &gt; Low voltage energy distribution &gt; BT DIN miniature circuit breakers &gt; BT DIN45 Thermal magnetic circuit breakers Icn=4.5kA



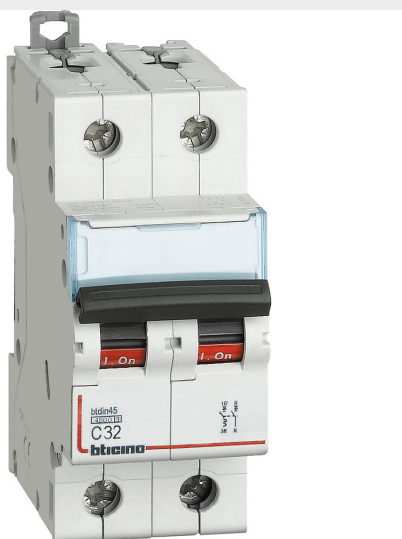

## FA81NC32

BT DIN45 - 1P+N thermal-magnetic curve C - In= 32A - Icn= 4,5kA - Vn= 230 Vac - 2 modules

### Technical features

|                             |                |
|-----------------------------|----------------|
| Protection index            | IP20           |
| Max section                 | 25/35mmq       |
| Height                      | 83mm           |
| Width                       | 35.6mm         |
| Depth                       | 76mm           |
| N° of modules               | 2              |
| Standard reference          | CEI EN 60898-1 |
| N° of poles                 | 1P+N           |
| Rated breaking capacity Icn | 4.5kA          |
| Rated voltage               | 230Vac         |
| Type of magnetic curve      | C              |
| Rated current               | 32A            |
| Series                      | Btdin          |

### Documentation

-  [DWG drawing](#)
-  [Catalogue BT DIN](#)

### Certificazioni



## Related products



### G23A32

Earth leakage module  
2P - type A - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac



### G23F32

Earth leakage module  
2P - type F - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac



### G23AC32

Earth leakage module  
2P - type AC - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac