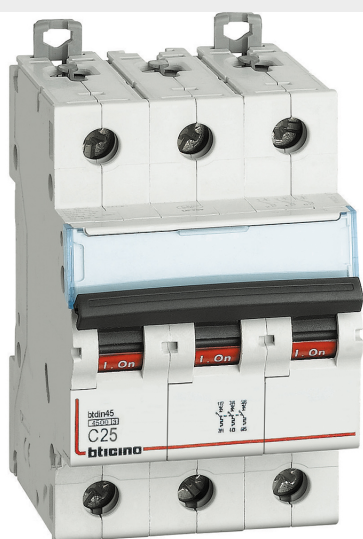


BTICINO > Low voltage energy distribution > BT DIN miniature circuit breakers > BT DIN45 Thermal magnetic circuit breakers I<sub>cn</sub>=4.5kA


## FA83C25

BTDIN45 - 3P thermal-magnetic curve C - I<sub>n</sub>= 25A - I<sub>cn</sub>= 4,5kA - V<sub>n</sub>= 400 Vac - 3 modules

### Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	53.4mm
Depth	76mm
N° of modules	3
Standard reference	CEI EN 60898-1
N° of poles	3P
Rated breaking capacity I <sub>cn</sub>	4.5kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	25A
Series	Btdin

### Documentation

 [Catalogue BT DIN](#)

### Certificazioni

