


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN45 Thermal magnetic circuit breakers Icn=4.5kA

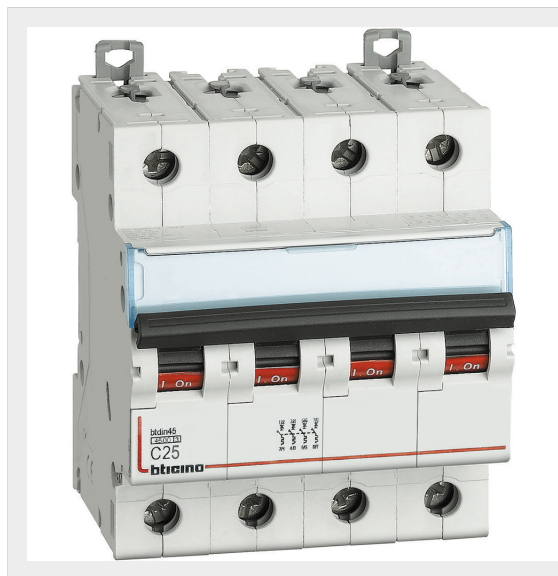

FA84C25


BTDIN45 - 4P thermal-magnetic curve C - In= 25A - Icn= 4,5kA - Vn= 400 Vac - 4 modules

Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	71.2mm
Depth	76mm
N° of modules	4
Standard reference	CEI EN 60898-1
N° of poles	4P
Rated breaking capacity Icn	4.5kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	25A
Series	Btdin

Documentation

 [DWG drawing](#)

 [Catalogue BTDIN](#)

Certificazioni



Related products



G43A32

Earth leakage module
4P - type A - $I_n = 32A$ -
 $I_{dn} = 30mA$ - $V_n = 400$
Vac



G43F32

Earth leakage module
4P - type F - $I_n = 32A$ -
 $I_{dn} = 30mA$ - $V_n = 400$
Vac



G43AC32

Earth leakage module
4P - type AC - $I_n = 32A$ -
 $I_{dn} = 30mA$ - $V_n = 400$
Vac