


BTICINO > Low voltage energy distribution > Circuit breakers for protection > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icn=10kA

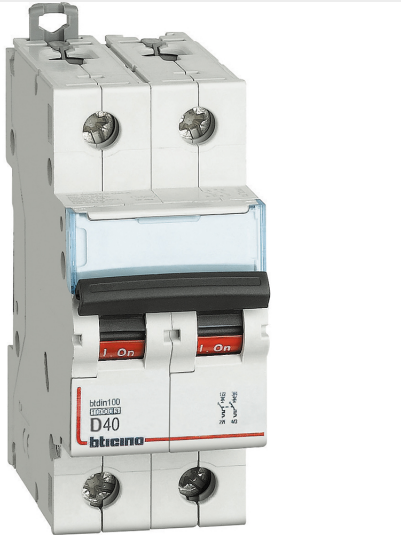


FH82D40


BTDIN100 - 2P thermal-magnetic curve D - In= 40A - Icn= 10kA - Vn= 400 Vac - 2 modules


Technical features

| | |
|-------------------------|----------------|
| Brand | BTicino |
| Standard reference | CEI EN 60898-1 |
| Rated voltage | 400Vac |
| Rated current | 40A |
| Rated breaking capacity | 10kA |
| Icn | |
| Tripping curve | D |
| N° of modules | 2 |
| N° of poles | 2P |
| Protection index | IP20 |
| Height | 83mm |
| Width | 35.6mm |
| Depth | 76mm |
| Max section | 25/35mmq |
| Series | Btdin |

Documentation

 [Technical Data Sheet](#)

 [DWG drawing](#)

 [Tripping curves](#)

Related products



G23A63

Earth leakage module
2P - type A - In= 63A -
Idn= 30mA - Vn=
230/400 Vac



G23F63

Earth leakage module
2P - type F - In= 63A -
Idn= 30mA - Vn=
230/400 Vac



G23AC63

Earth leakage module
2P - type AC - In= 63A -
Idn= 30mA - Vn=
230/400 Vac