


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icn=10kA

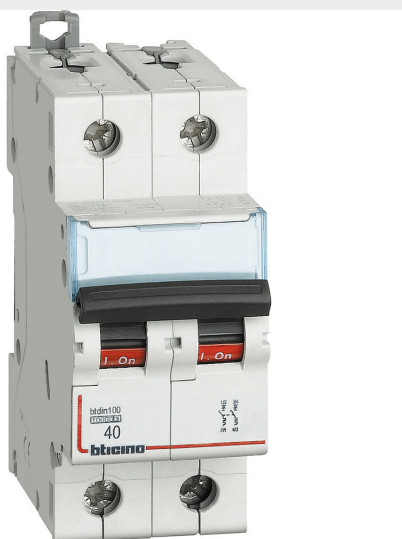

FH82K40

BTDIN100 - 2P thermal-magnetic curve K - In= 40A - Icn= 10kA - Vn= 400 Vac - 2 modules

Technical features

| | |
|--------------------------------|----------------|
| Protection index | IP20 |
| Max section | 25/35mmq |
| Height | 83mm |
| Width | 35.6mm |
| Depth | 76mm |
| N° of modules | 2 |
| Standard reference | CEI EN 60947-2 |
| N° of poles | 2P |
| Ultimate breaking capacity Icu | 10kA |
| Rated voltage | 400Vac |
| Type of magnetic curve | K |
| Rated current | 40A |
| Series | Btdin |

Documentation

 [DWG drawing](#)

 [Catalogue BTDIN](#)