


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icn=10kA



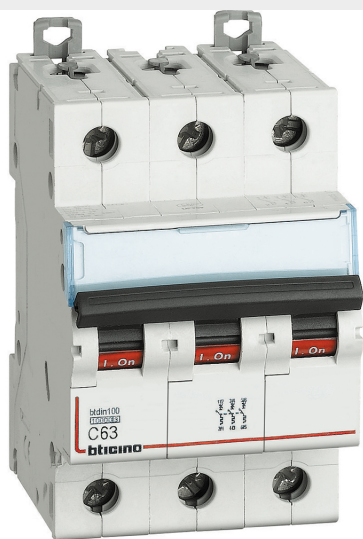

FH83C63

BTDIN100 - 3P thermal-magnetic curve C - In= 63A - Icn= 10kA - Vn= 400 Vac - 3 modules

Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	53.4mm
Depth	76mm
N° of modules	3
Standard reference	CEI EN 60898-1
N° of poles	3P
Rated breaking capacity Icn	10kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	63A
Series	Btdin

Documentation

-  [DWG drawing](#)
-  [Catalogue BTDIN](#)

Certificazioni



Related products



G33A63

Earth leakage module
3P - type A - In= 63A -
Idn= 30mA - Vn= 400
Vac



G33F63

Earth leakage module
3P - type F - In= 63A -
Idn= 30mA - Vn= 400
Vac



G33AC63

Earth leakage module
3P - type AC - In= 63A -
Idn= 30mA - Vn= 400
Vac