


BTICINO &gt; Low voltage energy distribution &gt; BTDIN miniature circuit breakers &gt; BTDIN100 Thermal magnetic circuit breakers Icn=10kA



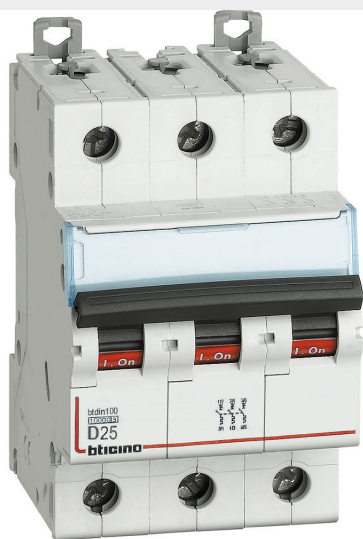

## FH83D25

BTDIN100 - 3P thermal-magnetic curve D - In= 25A - Icn= 10kA - Vn= 400 Vac - 3 modules

### Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	53.4mm
Depth	76mm
N° of modules	3
Standard reference	CEI EN 60898-1
N° of poles	3P
Rated breaking capacity Icn	10kA
Rated voltage	400Vac
Type of magnetic curve	D
Rated current	25A
Series	Btdin

### Documentation

-  [DWG drawing](#)
-  [Catalogue BTDIN](#)

### Certificazioni

