


BTICINO > Low voltage energy distribution > BT DIN miniature circuit breakers > BT DIN60 Thermal magnetic circuit breakers I<sub>cn</sub>=6kA

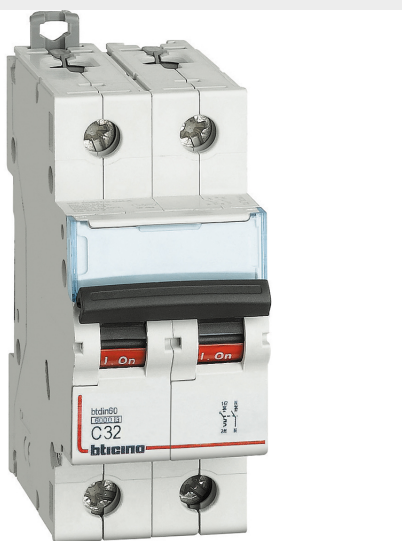

## FN81NC32

BTDIN60 - 1P+N thermal-magnetic curve C - I<sub>n</sub>= 32A - I<sub>cn</sub>= 6kA  
- V<sub>n</sub>= 230 Vac - 2 modules

### Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	35.6mm
Depth	76mm
N° of modules	2
Standard reference	CEI EN 60898-1
N° of poles	1P+N
Rated breaking capacity I <sub>cn</sub>	6kA
Rated voltage	230Vac
Type of magnetic curve	C
Rated current	32A
Series	Btdin

### Documentation

 [Catalogue BTDIN](#)

### Certificazioni



## Related products



### G23A32

Earth leakage module  
2P - type A - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac



### G23F32

Earth leakage module  
2P - type F - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac



### G23AC32

Earth leakage module  
2P - type AC - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac