


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN60 Thermal magnetic circuit breakers Icn=6kA

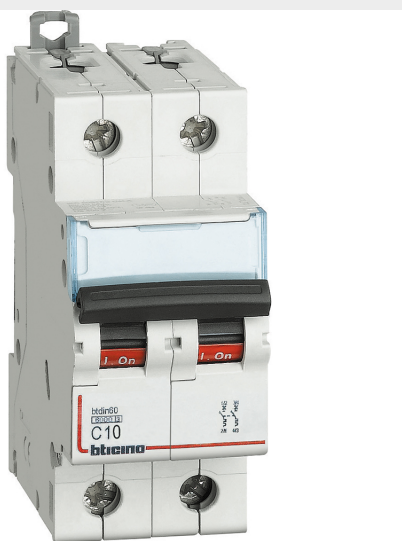

FN82C10

BTDIN60 - 2P thermal-magnetic curve C - In= 10A - Icn= 6kA - Vn= 400 Vac - 2 modules

Technical features

| | |
|-----------------------------|----------------|
| Protection index | IP20 |
| Max section | 25/35mmq |
| Height | 83mm |
| Width | 35.6mm |
| Depth | 76mm |
| N° of modules | 2 |
| Standard reference | CEI EN 60898-1 |
| N° of poles | 2P |
| Rated breaking capacity Icn | 6kA |
| Rated voltage | 400Vac |
| Type of magnetic curve | C |
| Rated current | 10A |
| Series | Btdin |

Documentation

- [DWG drawing](#)
- [Catalogue BTDIN](#)

Certificazioni



Related products



G23A32

Earth leakage module
2P - type A - In= 32A -
Idn= 30mA - Vn=
230/400 Vac



G23F32

Earth leakage module
2P - type F - In= 32A -
Idn= 30mA - Vn=
230/400 Vac



G23AC32

Earth leakage module
2P - type AC - In= 32A -
Idn= 30mA - Vn=
230/400 Vac