


BTICINO > Low voltage energy distribution > BT DIN miniature circuit breakers > BT DIN60 Thermal magnetic circuit breakers I_{cn}=6kA

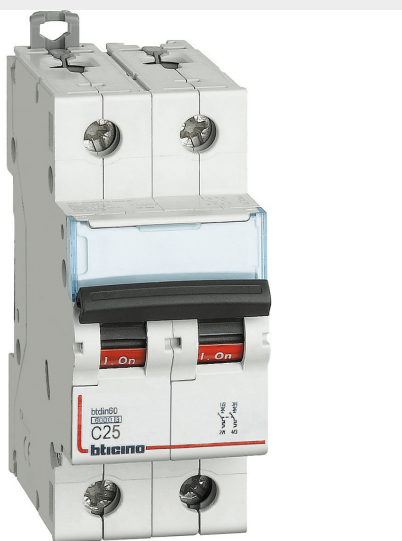


FN82C25

BT DIN60 - 2P thermal-magnetic curve C - I_n= 25A - I_{cn}= 6kA - V_n= 400 Vac - 2 modules

Technical features

| | |
|---|----------------|
| Protection index | IP20 |
| Max section | 25/35mmq |
| Height | 83mm |
| Width | 35.6mm |
| Depth | 76mm |
| N° of modules | 2 |
| Standard reference | CEI EN 60898-1 |
| N° of poles | 2P |
| Rated breaking capacity I _{cn} | 6kA |
| Rated voltage | 400Vac |
| Type of magnetic curve | C |
| Rated current | 25A |
| Series | Btdin |

Documentation

-  [DWG drawing](#)
-  [Catalogue BT DIN](#)

Certificazioni



Related products



G23A32

Earth leakage module
2P - type A - In= 32A -
Idn= 30mA - Vn=
230/400 Vac



G23F32

Earth leakage module
2P - type F - In= 32A -
Idn= 30mA - Vn=
230/400 Vac



G23AC32

Earth leakage module
2P - type AC - In= 32A -
Idn= 30mA - Vn=
230/400 Vac