


BTICINO &gt; Low voltage energy distribution &gt; BT DIN miniature circuit breakers &gt; BT DIN60 Thermal magnetic circuit breakers Icn=6kA

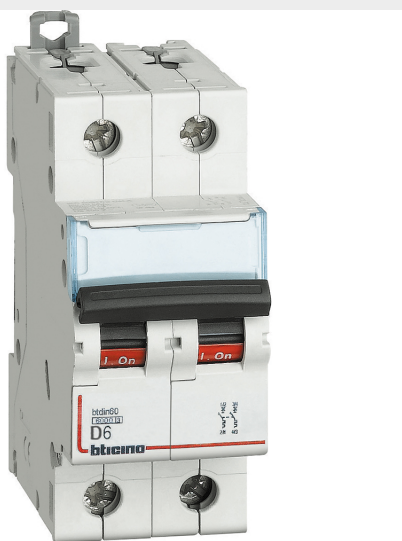

## FN82D6

BT DIN60 - 2P thermal-magnetic curve D - In= 6A - Icn= 6kA - Vn= 400 Vac - 2 modules

### Technical features

|                             |                |
|-----------------------------|----------------|
| Protection index            | IP20           |
| Max section                 | 25/35mmq       |
| Height                      | 83mm           |
| Width                       | 35.6mm         |
| Depth                       | 76mm           |
| N° of modules               | 2              |
| Standard reference          | CEI EN 60898-1 |
| N° of poles                 | 2P             |
| Rated breaking capacity Icn | 6kA            |
| Rated voltage               | 400Vac         |
| Type of magnetic curve      | D              |
| Rated current               | 6A             |
| Series                      | Btdin          |

### Documentation

 [DWG drawing](#)

 [Catalogue BT DIN](#)

### Certificazioni



## Related products



### G23A32

Earth leakage module  
2P - type A - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac



### G23F32

Earth leakage module  
2P - type F - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac



### G23AC32

Earth leakage module  
2P - type AC - In= 32A -  
Idn= 30mA - Vn=  
230/400 Vac