


BTICINO &gt; Low voltage energy distribution &gt; BTDIN miniature circuit breakers &gt; BTDIN60 Thermal magnetic circuit breakers Icn=6kA



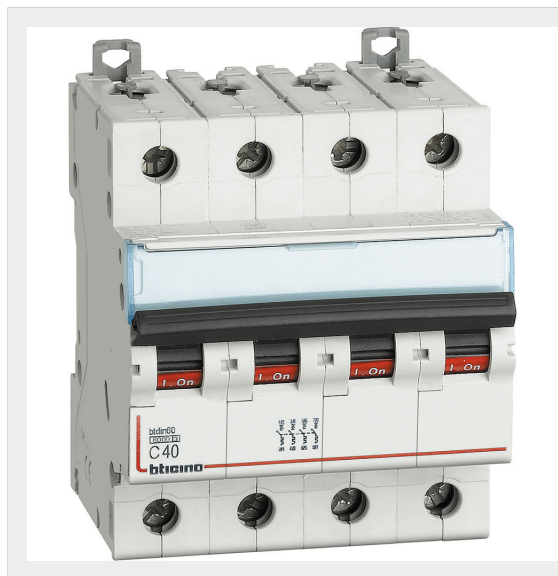

## FN84C40

BTDIN60 - 4P thermal-magnetic curve C - In= 40A - Icn= 6kA - Vn= 400 Vac - 4 modules

### Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	71.2mm
Depth	76mm
N° of modules	4
Standard reference	CEI EN 60898-1
N° of poles	4P
Rated breaking capacity Icn	6kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	40A
Series	Btdin

### Documentation

-  [DWG drawing](#)
-  [Catalogue BTDIN](#)

### Certificazioni



## Related products



### G43A63

Earth leakage module  
4P - type A - In= 63A -  
Idn= 30mA - Vn= 400  
Vac



### G43F63

Earth leakage module  
4P - type F - In= 63A -  
Idn= 30mA - Vn= 400  
Vac



### G43AC63

Earth leakage module  
4P - type AC - In= 63A -  
Idn= 30mA - Vn= 400  
Vac