


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icu=16kA

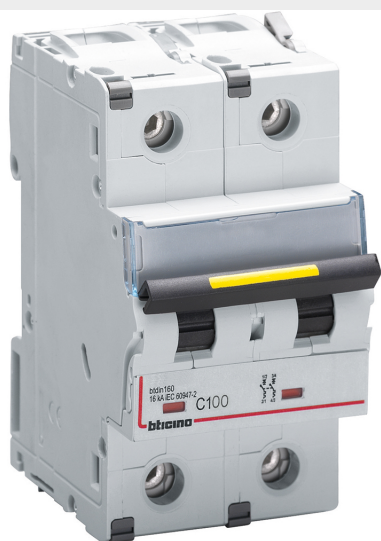

FT82C100


BTDIN160 - 2P thermal-magnetic curve C - In= 100A - Icu= 16kA
- Vn= 400 Vac - 3 modules

Technical features

Protection index	IP20
Max section	50/70mmq
Height	83mm
Width	53.4mm
Depth	76mm
N° of modules	3
Standard reference	CEI EN 60947-2
N° of poles	2P
Ultimate breaking capacity Icu	16kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	100A
Series	Btdin

Documentation

 [Instructions Sheet](#)

 [Catalogue BTDIN](#)

Related products



G23XF125

Earth leakage module
2P - type F - In= 125A -
Idn= 30mA - Vn=
230/400 Vac



G23XAC125

Earth leakage module
2P - type AC - In= 125A
- Idn= 30mA - Vn=
230/400 Vac



G27XF125

Earth leakage module
2P - type F - In= 125A -
Vn= 230/400 Vac - time
and current setting