


BTICINO &gt; Low voltage energy distribution &gt; BTDIN miniature circuit breakers &gt; BTDIN100 Thermal magnetic circuit breakers Icu=16kA

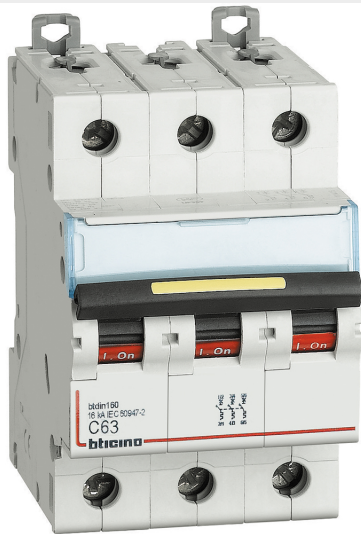

## FT83C63


BTDIN160 - 3P thermal-magnetic curve C - In= 63A - Icu= 16kA - Vn= 400 Vac - 3 modules

### Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	53.4mm
Depth	76mm
N° of modules	3
Standard reference	CEI EN 60947-2
N° of poles	3P
Ultimate breaking capacity Icu	16kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	63A
Series	Btdin

### Documentation

 [DWG drawing](#)

 [Catalogue BTDIN](#)

## Related products



### G33A63

Earth leakage module  
3P - type A - In= 63A -  
Idn= 30mA - Vn= 400  
Vac



### G33F63

Earth leakage module  
3P - type F - In= 63A -  
Idn= 30mA - Vn= 400  
Vac



### G33AC63

Earth leakage module  
3P - type AC - In= 63A -  
Idn= 30mA - Vn= 400  
Vac