


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icu=16kA

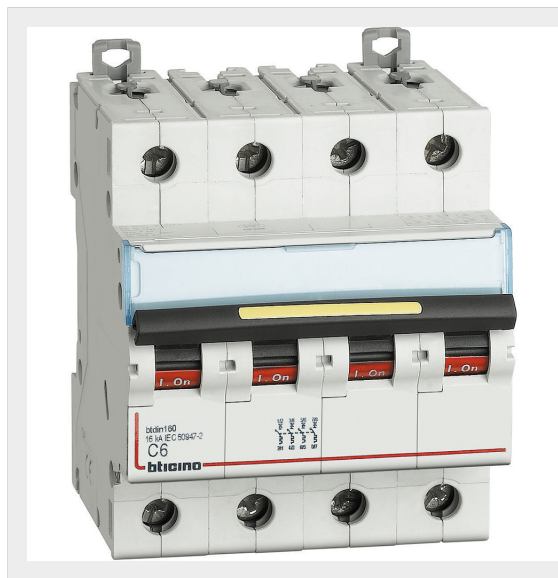


FT84C6

BTDIN160 - 4P thermal-magnetic curve C - In= 6A - Icu= 16kA - Vn= 400 Vac - 4 modules

Technical features

| | |
|--------------------------------|----------------|
| Protection index | IP20 |
| Max section | 25/35mmq |
| Height | 83mm |
| Width | 71.2mm |
| Depth | 76mm |
| N° of modules | 4 |
| Standard reference | CEI EN 60947-2 |
| N° of poles | 4P |
| Ultimate breaking capacity Icu | 16kA |
| Rated voltage | 400Vac |
| Type of magnetic curve | C |
| Rated current | 6A |
| Series | Btdin |

Documentation

 [Catalogue BTDIN](#)

Related products



G43A32

Earth leakage module
4P - type A - $I_n = 32A$ -
 $I_{dn} = 30mA$ - $V_n = 400$
Vac



G43F32

Earth leakage module
4P - type F - $I_n = 32A$ -
 $I_{dn} = 30mA$ - $V_n = 400$
Vac



G43AC32

Earth leakage module
4P - type AC - $I_n = 32A$ -
 $I_{dn} = 30mA$ - $V_n = 400$
Vac