


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icu=16kA



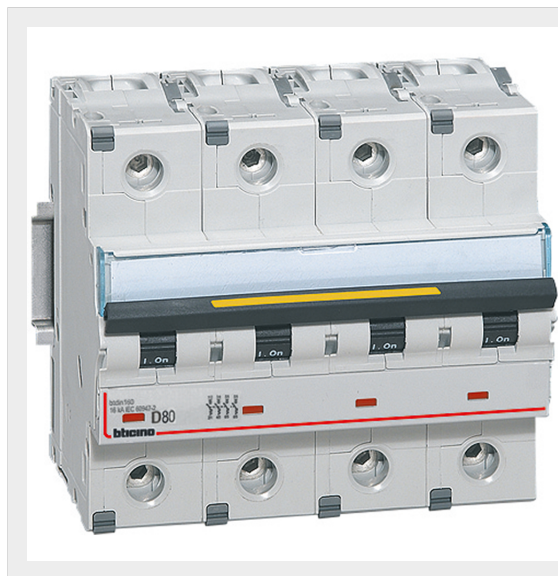


FT84D80

BTDIN160 - 4P thermal-magnetic curve D - In= 80A - Icu= 16kA - Vn= 400 Vac - 6 modules

Technical features

| | |
|--------------------------------|----------------|
| Protection index | IP20 |
| Max section | 50/70mmq |
| Height | 83mm |
| Width | 106.8mm |
| Depth | 76mm |
| N° of modules | 6 |
| Standard reference | CEI EN 60947-2 |
| N° of poles | 4P |
| Ultimate breaking capacity Icu | 16kA |
| Rated voltage | 400Vac |
| Type of magnetic curve | D |
| Rated current | 80A |
| Series | Btdin |

Documentation

-  [Instructions Sheet](#)
-  [DWG drawing](#)
-  [Catalogue BTDIN](#)

Related products



G43XF125

Earth leakage module
4P - type F - In= 125A -
Idn= 30mA - Vn= 400
Vac



G43XAC125

Earth leakage module
4P - type AC - In= 125A
- Idn= 30mA - Vn= 400
Vac



G47XF125

Earth leakage module
4P - type F - In= 125A -
Vn= 400 Vac - time and
current setting



G44XAC125

Earth leakage module
4P - type AC - In= 125A
- Idn= 300mA - Vn= 400
Vac