


BTICINO &gt; Low voltage energy distribution &gt; Circuit breakers for protection &gt; BTDIN miniature circuit breakers &gt; BTDIN250 magnetic only Icu=25kA

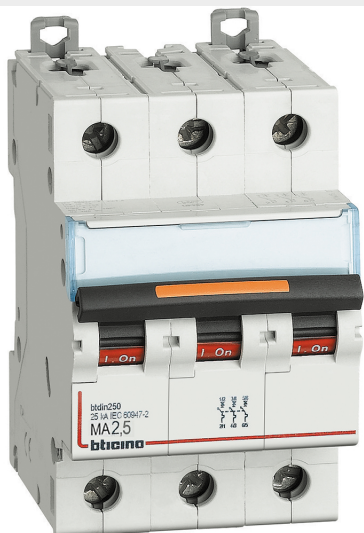


## FV83SM32

BTDIN250 - magnetic only 3P - curve 12-14In - In= 2,5A - Im= 32A - Icu= 25kA - Vn= 400Vac - 3 modules

### Technical features

Brand	BTicino
Standard reference	CEI EN 60947-2
Rated voltage	400Va.c.
Rated current	2.5A
Ultimate breaking capacity Icu	25kA
Tripping curve	12-14In
N° of modules	3
N° of poles	3P
Protection index	IP20
Height	83mm
Width	53.4mm
Depth	76mm
Max section	25/35mm
Series	Btdin

### Documentation

 [Tripping curves](#)