


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN250 magnetic only Icu=25kA

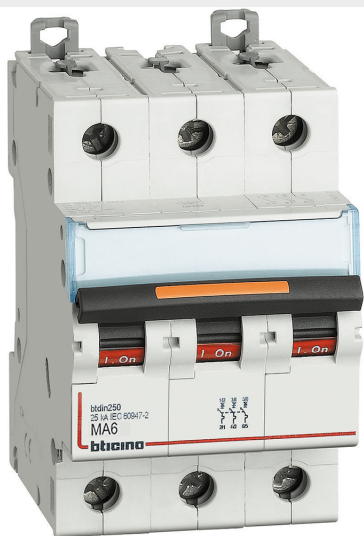

FV83SM50

BTDIN250 - magnetic only 3P - curve 12-14In - In= 6A - Im= 50A
 - Icu= 25kA - Vn= 400Vac - 3 modules

Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	53.4mm
Depth	76mm
N° of modules	3
Standard reference	CEI EN 60947-2
N° of poles	3P
Ultimate breaking capacity Icu	25kA
Rated voltage	400Vac
Type of magnetic curve	12-14In
Rated current	6A
Series	Btdin

Documentation

 [Catalogue BTDIN](#)