


BTICINO > Low voltage energy distribution > Circuit breakers for protection > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icu=25kA

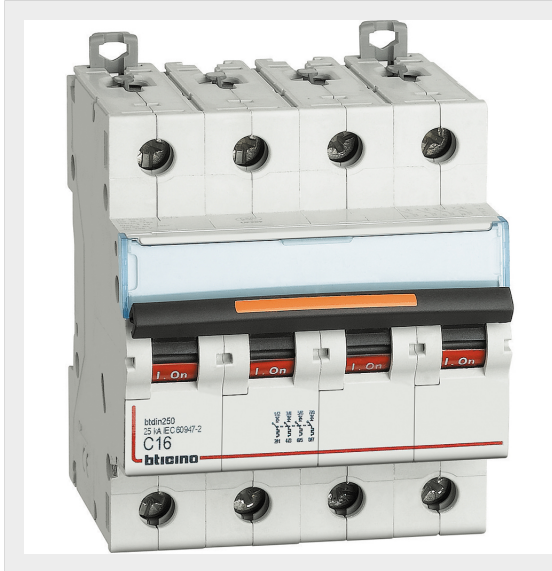

FV84C16

BTDIN250 - 4P thermal-magnetic curve C - In= 16A - Icu= 25kA - Vn= 400Vac - 4 modules

Technical features

| | |
|--------------------------------|----------------|
| Brand | BTicino |
| Standard reference | CEI EN 60947-2 |
| Rated voltage | 400Vac |
| Rated current | 16A |
| Ultimate breaking capacity Icu | 25kA |
| Tripping curve | C |
| N° of modules | 4 |
| N° of poles | 4P |
| Protection index | IP20 |
| Height | 83mm |
| Width | 71.2mm |
| Depth | 76mm |
| Max section | 25/35mmq |
| Series | Btdin |

Documentation

 [DWG drawing](#)

 [Tripping curves](#)

Related products



G43A32

Earth leakage module
4P - type A - In= 32A -
Idn= 30mA - Vn= 400
Vac



G43F32

Earth leakage module
4P - type F - In= 32A -
Idn= 30mA - Vn= 400
Vac



G43AC32

Earth leakage module
4P - type AC - In= 32A -
Idn= 30mA - Vn= 400
Vac