


BTICINO &gt; Low voltage energy distribution &gt; BTDIN miniature circuit breakers &gt; BTDIN100 Thermal magnetic circuit breakers Icu=25kA

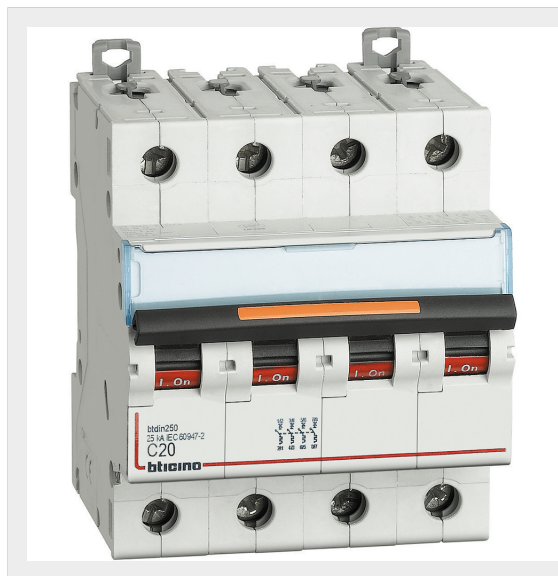

## FV84C20

BTDIN250 - 4P thermal-magnetic curve C - In= 20A - Icu= 25kA - Vn= 400Vac - 4 modules

### Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	71.2mm
Depth	76mm
N° of modules	4
Standard reference	CEI EN 60947-2
N° of poles	4P
Ultimate breaking capacity Icu	25kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	20A
Series	Btdin

### Documentation

 [Catalogue BTDIN](#)

## Related products



### G43A32

Earth leakage module  
4P - type A -  $I_n = 32A$  -  
 $I_{dn} = 30mA$  -  $V_n = 400$   
Vac



### G43F32

Earth leakage module  
4P - type F -  $I_n = 32A$  -  
 $I_{dn} = 30mA$  -  $V_n = 400$   
Vac



### G43AC32

Earth leakage module  
4P - type AC -  $I_n = 32A$  -  
 $I_{dn} = 30mA$  -  $V_n = 400$   
Vac