


BTICINO &gt; Low voltage energy distribution &gt; Circuit breakers for protection &gt; BTDIN miniature circuit breakers &gt; BTDIN100 Thermal magnetic circuit breakers Icu=25kA

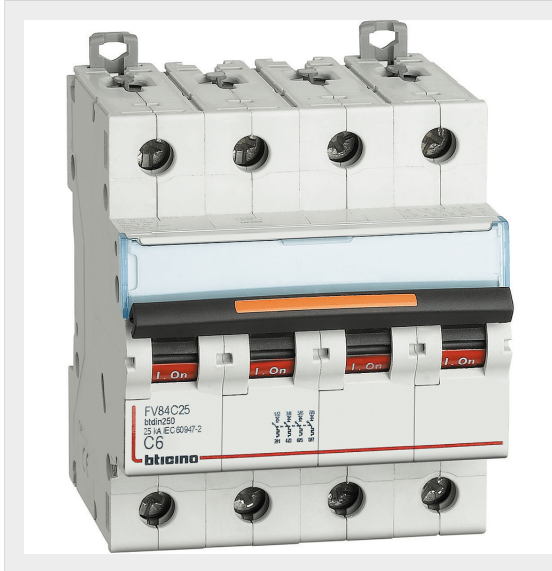

## FV84C6

BTDIN250 - 4P thermal-magnetic curve C - In= 6A - Icu= 25kA - Vn= 400Vac - 4 modules

### Technical features

Brand	BTicino
Standard reference	CEI EN 60947-2
Rated voltage	400Vac
Rated current	6A
Ultimate breaking capacity	25kA
Icu	
Tripping curve	C
N° of modules	4
N° of poles	4P
Protection index	IP20
Height	83mm
Width	71.2mm
Depth	76mm
Max section	25/35mmq
Series	Btdin

### Documentation

 [Tripping curves](#)

## Related products



### G43A32

Earth leakage module  
4P - type A -  $I_n = 32A$  -  
 $I_{dn} = 30mA$  -  $V_n = 400$   
Vac



### G43F32

Earth leakage module  
4P - type F -  $I_n = 32A$  -  
 $I_{dn} = 30mA$  -  $V_n = 400$   
Vac



### G43AC32

Earth leakage module  
4P - type AC -  $I_n = 32A$  -  
 $I_{dn} = 30mA$  -  $V_n = 400$   
Vac