


BTICINO &gt; Low voltage energy distribution &gt; BTDIN miniature circuit breakers &gt; BTDIN45 Earth leakage thermal magnetic circuit breakers Icn=4.5kA

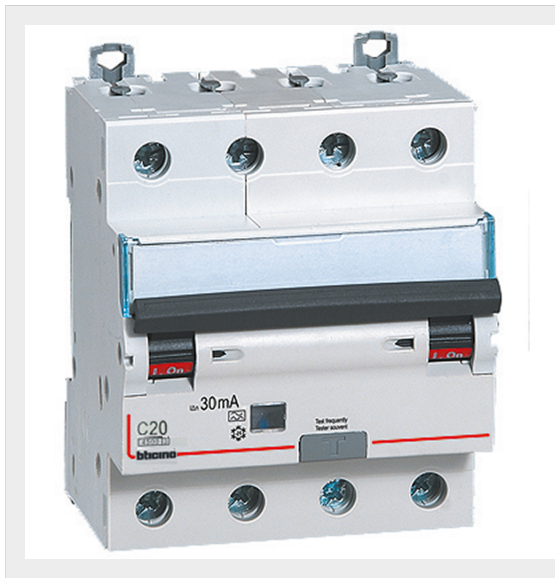


## GA8843A20


BTDIN45 - thermal-magnetic with earth leakage protection 4P - type A - In= 20A - Icn= 4,5kA - Vn=230 Vac - I<sub>dn</sub>= 30mA - 4 modules

### Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	71.2mm
Depth	76mm
N° of modules	4
Standard reference	CEI EN 61009-1
N° of poles	4P
Rated breaking capacity I <sub>cn</sub>	4.5kA
Rated voltage	230Vac
Type of magnetic curve	C
Earth leakage type	A
Earth leakage rated current	0.03A
Rated current	20A
Series	Btdin

### Documentation

 [DWG drawing](#)

 [Catalogue BTDIN](#)

### Certificazioni

