


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN60 Earth leakage thermal magnetic circuit breakers Icn=6kA



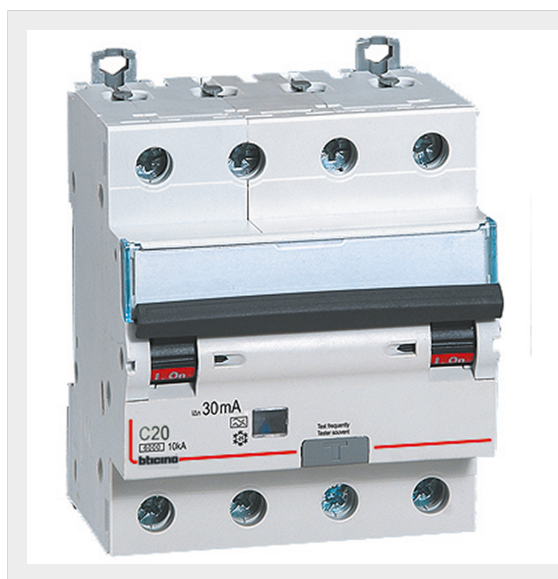

GN8843A20

BTDIN60 - thermal-magnetic with earth leakage protection 4P - type A - In= 20A - Icn= 6kA - Vn= 400 Vac - Idn= 30mA - 4 modules

Technical features

| | |
|-----------------------------|----------------|
| Protection index | IP20 |
| Max section | 25/35mmq |
| Height | 83mm |
| Width | 71.2mm |
| Depth | 76mm |
| N° of modules | 4 |
| Standard reference | CEI EN 61009-1 |
| N° of poles | 4P |
| Rated breaking capacity Icn | 6kA |
| Rated voltage | 400Vac |
| Type of magnetic curve | C |
| Earth leakage type | A |
| Earth leakage rated current | 0.03A |
| Rated current | 20A |
| Series | Btdin |

Documentation

-  [DWG drawing](#)
-  [Catalogue BTDIN](#)

Certificazioni

