


BTICINO > Wiring devices > My Home > Light and Shutter automation







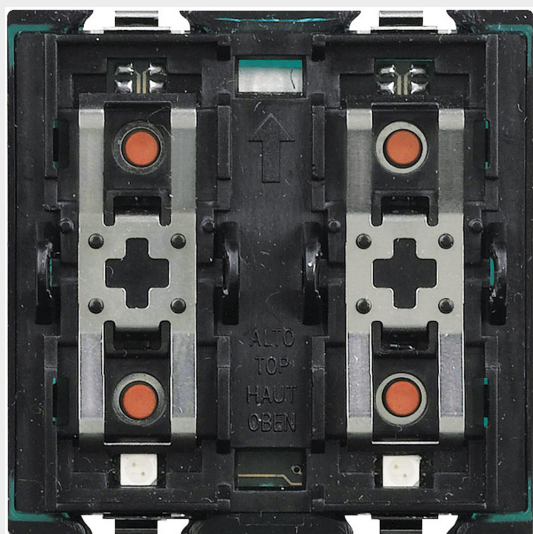

H4651M2

Actuator with 2 independent relays - for single, double, and mixed loads: 2 A resistive, 2 A for filament lamps, 500 W for motor reducers, 2 A cos ϕ 0.5 for ferromagnetic transformers, and 70 W for fluorescent lamps - logic relay interlock via the configuration. The device may also be configured to manage a remote actuator – 2 modules

Technical features

| | |
|---------------|--------|
| N° of modules | 2 |
| Rated voltage | 27Vdc |
| Rated current | 0,006A |
| Series | MyHome |

Documentation

-  [Scheda Tecnica](#)
-  [Technical data sheet](#)
-  [Technical guide](#)
-  [My Home guidelines](#)
-  [Technical guide](#)
-  [Brochure](#)

Certificazioni

