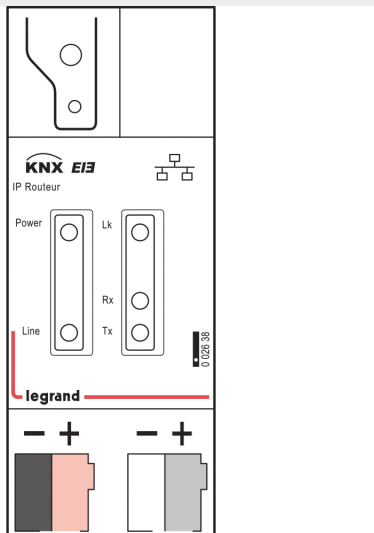


BTICINO > Distribution and management solutions for the service sector > Konnex system > Gateway and interfaces


002638

KNX/IP gateway with router, for the connection of KNX lines through computer networks using the IP protocol. The device also allows for simultaneous access to the BUS KNX line from any PC or data processing device connected to the network. Main functions: Simple IP (Internet Protocol) connection to BUS KNX systems - Direct access to the KNX installation from any point of the IP network (KNXnet/IP tunnelling) - Quick communication among lines, KNX system areas (KNXnet/IP routing) - Filtering and routing of telegrams Bus connection using a red-black KNX connector. SELV 29 V d.c. supply voltage from KNX bus. Fitting on DIN rail. Size: 2 DIN modules.

Technical features

N° of modules	2 DIN
Rated voltage	29 Vd.c.

Documentation

[DWG drawing](#)
[KNX catalogue](#)

Related products


002694

KNX modular power supply. Connection to the bus via KNX Rossoneri connector. Input voltage: 230 V ...