


BTICINO &gt; Wiring devices &gt; KNX Automation System &gt; Modular controller

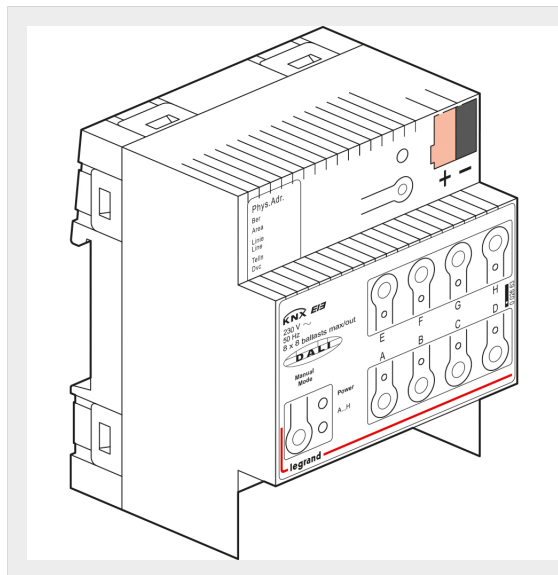


002663

KNX/DALI interface with 8 independent channels, each capable of managing up to 8 ballasts. Main functions: Switching, dimmer and forwarding of a dimmer level value - Configuration of ON / OFF switching times, dimmer from 0 to 100 % and from 100 to 0% - Configuration of the minimum / maximum dimmer level - Configuration of 8 bit scenarios for each channel, with the possibility to assign up to 16 scenarios to one channel - Configuration of the objects for the return of the status relating to lamp switching/ dimmer/fault, and DALI status Bus connection using a red-black KNX connector. Supply voltage 110 - 240 V 50-60 Hz. Fitting on DIN rail. Size: 4 DIN modules.

## Technical features

Brand	Legrand
Rated voltage	110 - 240 Va.c.
N° of modules	4 DIN

## Documentation

 [ETS Project File](#)
 [DWG drawing](#)
 [DWG drawing](#)
 [KNX catalogue](#)