


BTICINO &gt; Distribution and management solutions for the service sector &gt; Konnex system &gt; Devices for infrastructure

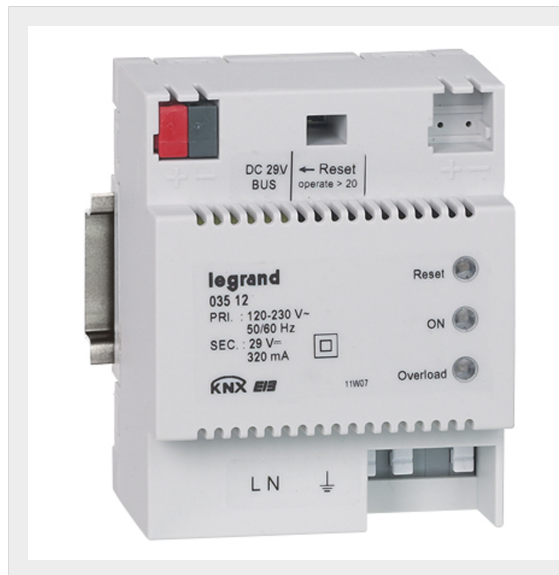

003512

KNX modular power supply. Connection to the bus via KNX Rossoneri connector. Input voltage: 230V + 10% to 15%, 50 to 60 Hz. Output voltage: 29 V ± 1 V d.c. SELV. output current: 320 mA. DIN rail mounting, dimensions 4 DIN modules

## Technical features

|               |   |
|---------------|---|
| N° of modules | 4 DIN   |
| Rated voltage | Out: 29 V ± 1 Vd.c. SELV.<br>In: 230 V<br>+10%÷-15%,50÷60 Hz. |
| Rated current | 320 mA  |

## Documentation

- [DWG drawing](#)
- [DWG drawing](#)
- [KNX catalogue](#)