


BTICINO > Wiring devices > KNX Automation System > Modular controller

048422

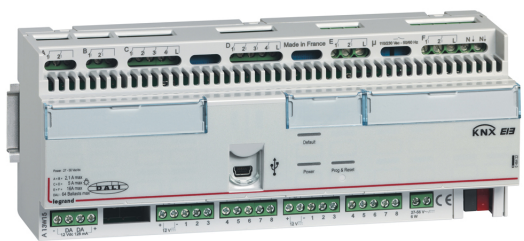


Multi-application controller with KNX 16 inputs and 16 outputs can realize multiple functions including: - Control ON-OFF lights or dimming via DALI protocol - Control of shutters - Control controllable outlets - Measurement of consumption of the connected loads (only on certain outputs) Each output can be controlled by traditional electromechanical devices or KNX devices and can be configured to operate according to three operating profiles different. Connection to the bus via red-black KNX connector. Supply voltage 27-50 Vd.c. DIN rail mounting. Dimensions: 12 DIN modules.

Technical features

Documentation

Brand	Legrand
Standard reference	EN 50090 - EN 13321-1 e ISO/IEC 14543-3
Rated voltage	27-50 Vdc
N° of modules	12 DIN
Protection index	IP 20 e IK 04
Cabling	KNX Bus
Plant type	KNX

 [ETS Project File](#) [DWG drawing](#) [KNX catalogue](#)