




BTICINO > ZUCCHINI busbar > MR Medium Rating > Horizontal elbows aluminium

50400301


Horizontal elbow (right) in Al for MR160 - In=160A - IP55 - length 300+300mm

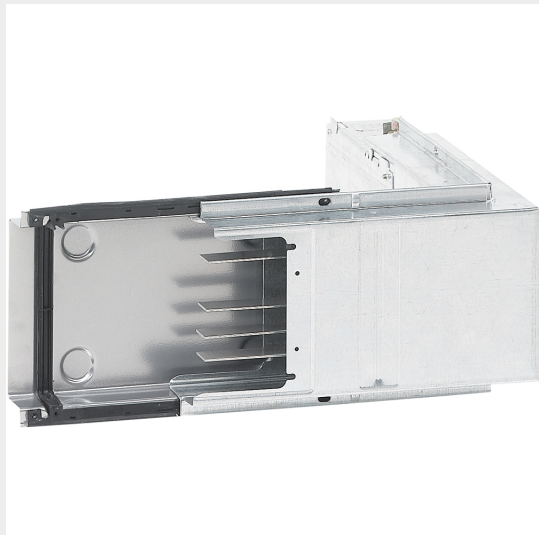


## Technical features











Protection index	IP55
Length	0.3+0.3m
Standard reference	CEI EN 61439-6
Rated voltage	1000V
Rated current	160A
Series	MR

## Documentation

 [Instructions Sheet](#)

 [Busbar catalogue](#)

## Related products

 <p><b>50400271-1600</b></p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 800m...</p>	 <p><b>50400261</b></p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (5+5, step 600m...</p>	 <p><b>50400261-2400</b></p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (4+4, step 600m...</p>	 <p><b>50400261-1200</b></p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 600m...</p>	 <p><b>50400271-2400</b></p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (3+3, step 800m...</p>
 <p><b>50400151</b></p> <p>Straight element MR160 AI with 2+2 outlets for side - In=160A - IP52 - length 1.5-3m</p>	 <p><b>50400111</b></p> <p>Straight element MR160 AI without outlets - In=160A - IP52 - length 0.6-1m</p>	 <p><b>50400141</b></p> <p>Straight element MR160 AI with 1+1 outlets for side - In=160A - IP52 - length 1-1.5m</p>	 <p><b>50400241</b></p> <p>Straight element MR160 AI without outlets - In=160A - IP52 - length 3m</p>	 <p><b>50400251</b></p> <p>Straight element MR160 AI with 5 outlets on one side only - In=160A - IP52 - length 3m</p>