




BTICINO > ZUCCHINI busbar > MR Medium Rating > Aluminium Feed units

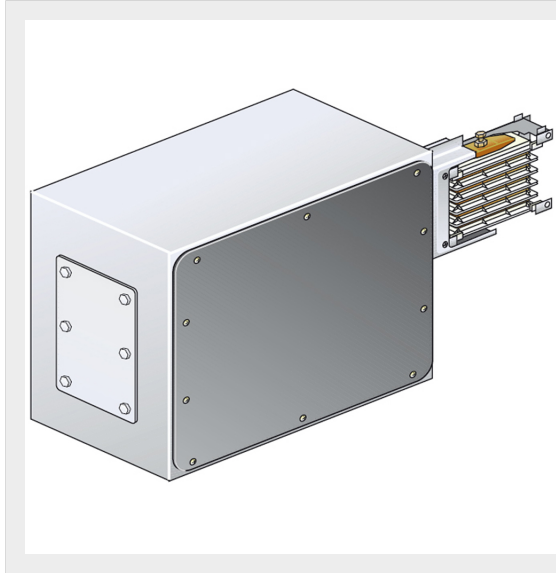


50401133


Left feed unit (BIG) for busbar in Al MR315 - In=315A - IP55

Technical features


Protection index	IP55
Standard reference	CEI EN 61439-6
Rated voltage	1000V
Rated current	315A
Series	MR

Documentation

 [Instruction Sheet](#)


 [Busbar catalogue](#)

Related products




50400273-2400

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (3+3, step 800m...




50400273-1600

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 800m...




50400263

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (5+5, step 600m...




50400263-2400

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (4+4, step 600m...




50400263-1200

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 600m...




50400103

Straight element MR315 AI with 3+3 outlets for side - In=315A - IP52 - length 3m




50400123

Straight element MR315 AI without outlets - In=315A - IP52 - length 1-1.5m




50400153

Straight element MR315 AI with 2+2 outlets for side - In=315A - IP52 - length 1.5-3m



50400113

Straight element MR315 AI without outlets - In=315A - IP52 - length 0.6-1m



50400143

Straight element MR315 AI with 1+1 outlets for side - In=315A - IP52 - length 1-1.5m