




BTICINO > ZUCCHINI busbar > MR Medium Rating > Aluminium Feed units

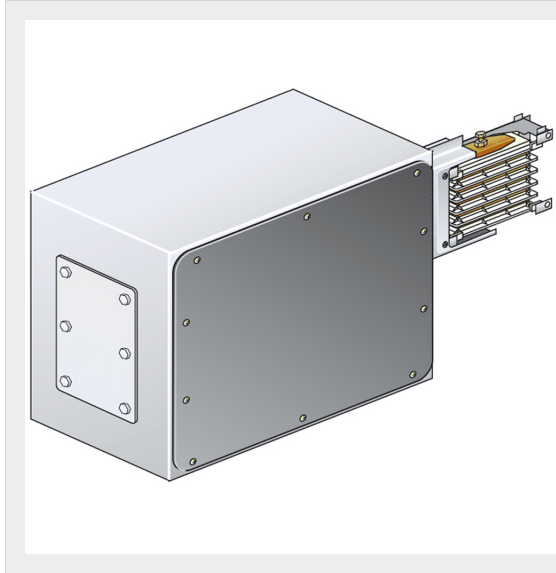

50401136


Left feed unit (BIG) for busbar in Al MR800 - In=800A - IP55

Technical features











Protection index	IP55
Standard reference	CEI EN 61439-6
Rated voltage	1000V
Rated current	800A
Series	MR

Documentation

 [Instructions Sheet](#)

 [Busbar catalogue](#)

Related products

 <p>50400276-1600</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 800m...</p>	 <p>50400266</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (5+5, step 600m...</p>	 <p>50400266-2400</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (4+4, step 600m...</p>	 <p>50400266-1200</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 600m...</p>	 <p>50400276-2400</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (3+3, step 800m...</p>
 <p>50400116</p> <p>Straight element MR800 AI without outlets - In=800A - IP52 - length 0.6-1m</p>	 <p>50400146</p> <p>Straight element MR800 AI with 1+1 outlets for side - In=800A - IP52 - length 1-1.5m</p>	 <p>50400246</p> <p>Straight element MR800 AI without outlets - In=800A - IP52 - length 3m</p>	 <p>50400256</p> <p>Straight element MR800 AI with 5 outlets on one side only - In=800A - IP52 - length 3m</p>	 <p>50400106</p> <p>Straight element MR800 AI with 3+3 outlets for side - In=800A - IP52 - length 3m</p>