




BTICINO > ZUCCHINI busbar > MR Medium Rating > Aluminium Feed units

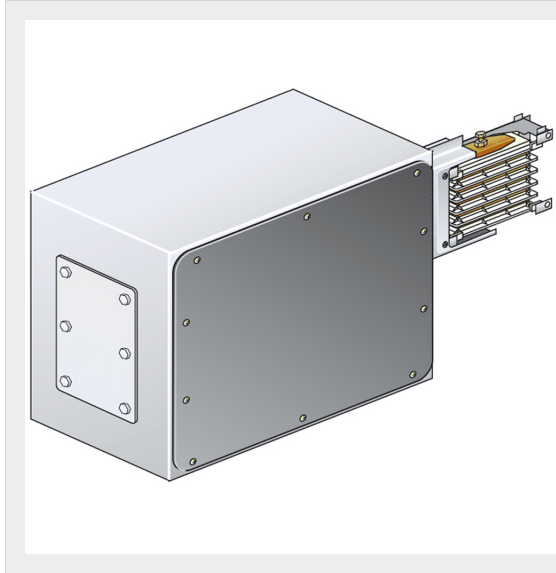


50401138

Left feed unit (BIG) for busbar in Al MR500 - In=500A - IP55

Technical features


Protection index	IP55
Standard reference	CEI EN 61439-6
Rated voltage	1000V
Rated current	500A
Series	MR

Documentation

 [Instructions Sheet](#)


 [Busbar catalogue](#)

Related products




50400278-2400

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (3+3, step 800m...




50400278-1600

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 800m...




50400268

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (5+5, step 600m...




50400268-2400

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (4+4, step 600m...




50400268-1200

Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 600m...




50400108

Straight element MR500 AI with 3+3 outlets for side - In=500A - IP52 - length 3m




50400128

Straight element MR500 AI without outlets - In=500A - IP52 - length 1-1.5m




50400158

Straight element MR500 AI with 2+2 outlets for side - In=500A - IP52 - length 1.5-3m



50400118

Straight element MR500 AI without outlets - In=500A - IP52 - length 0.6-1m



50400148

Straight element MR500 AI with 1+1 outlets for side - In=500A - IP52 - length 1-1.5m