




BTICINO > ZUCCHINI busbar > MR Medium Rating > Aluminium Feed units

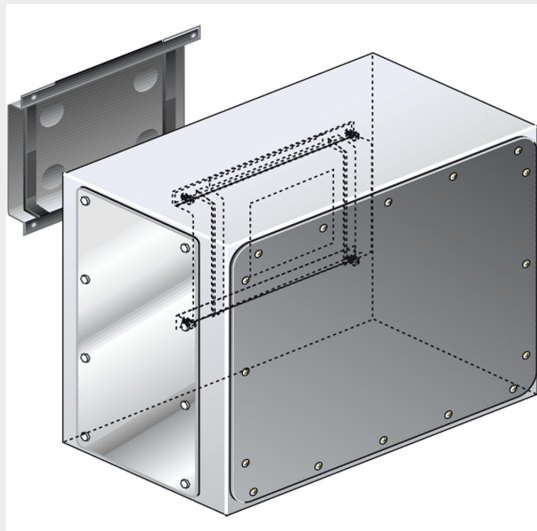


50401203


Intermediate feed unit for busbar AI MR315 - In=315A - IP55

Technical features











Protection index	IP55
Standard reference	CEI EN 61439-6
Rated voltage	1000V
Rated current	315A
Series	MR

Documentation

 [Instructions Sheet](#)

 [Busbar catalogue](#)

Related products

 <p>50400263-2400</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (4+4, step 600m...</p>	 <p>50400263-1200</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 600m...</p>	 <p>50400273-2400</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (3+3, step 800m...</p>	 <p>50400273-1600</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (2+2, step 800m...</p>	 <p>50400263</p> <p>Data Center straight elements (IP40). Aluminium conductors and windows on both sides (5+5, step 600m...</p>
 <p>50400253</p> <p>Straight element MR315 AI with 5 outlets on one side only - In=315A - IP52 - length 3m</p>	 <p>50400103</p> <p>Straight element MR315 AI with 3+3 outlets for side - In=315A - IP52 - length 3m</p>	 <p>50400123</p> <p>Straight element MR315 AI without outlets - In=315A - IP52 - length 1-1.5m</p>	 <p>50400153</p> <p>Straight element MR315 AI with 2+2 outlets for side - In=315A - IP52 - length 1.5-3m</p>	 <p>50400113</p> <p>Straight element MR315 AI without outlets - In=315A - IP52 - length 0.6-1m</p>