


BTICINO > Distribution and management solutions for the service sector > Hotel Room Management > Interfaces







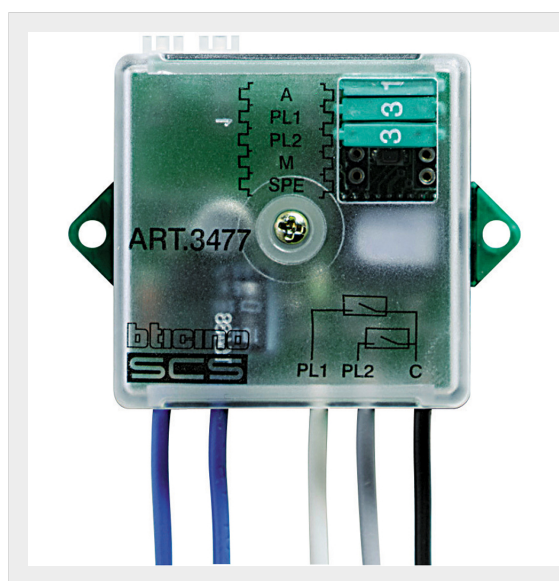

3477

Basic module control interface with 2 independent contacts for the control of 2 actuators for single function loads, or 1 actuator for double function loads (rolling shutters) - the inputs accepts two traditional switches or pushbuttons with NO and NC contact, or a traditional two-way switch, or interlocked pushbuttons

Technical features

Rated voltage	27Vdc
Rated current	0,0035A
Series	MyHome

Documentation

-  [Technical data sheet](#)
-  [Technical data sheet](#)
-  [Technical guide](#)
-  [My Home guidelines](#)
-  [Technical guide](#)
-  [Brochure](#)

Certificazioni



Related products



3510M

NC electromagnetic contact interface detectors and protection line - flush mounted version. Made of ...



3513

NC electromagnetic contact interface detectors and protection line - flush mounted version. Made of ...



3510

NC electromagnetic contact interface detectors and protection line - flush mounted version



3512

NC electromagnetic contact interface detectors and protection line - flush mounted version. Made of ...



3511

NC electromagnetic contact interface detectors and protection line - visible mounted version



3510PB

NC electromagnetic contact interface detectors and protection line - flush mounted version. Made of ...