


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icu=16kA

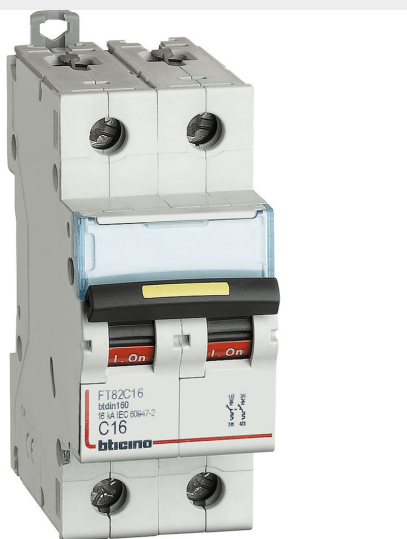


FT82C16


BTDIN160 - 2P thermal-magnetic curve C - In= 16A - Icu= 16kA - Vn= 400 Vac - 2 modules

Technical features

Protection index	IP20
Max section	25/35mmq
Height	83mm
Width	35.6mm
Depth	76mm
N° of modules	2
Standard reference	CEI EN 60947-2
N° of poles	2P
Ultimate breaking capacity Icu	16kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	16A
Series	Btdin

Documentation

 [DWG drawing](#)

 [Catalogue BTDIN](#)

Related products



G23A32

Earth leakage module
2P - type A - In= 32A -
Idn= 30mA - Vn=
230/400 Vac



G23F32

Earth leakage module
2P - type F - In= 32A -
Idn= 30mA - Vn=
230/400 Vac



G23AC32

Earth leakage module
2P - type AC - In= 32A -
Idn= 30mA - Vn=
230/400 Vac