


BTICINO > Low voltage energy distribution > BTDIN miniature circuit breakers > BTDIN100 Thermal magnetic circuit breakers Icu=16kA



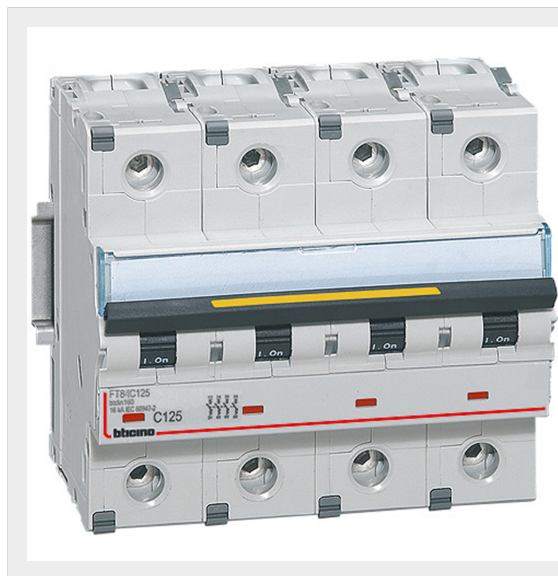


FT84C125

BTDIN160 - 4P thermal-magnetic curve C - In= 125A - Icu= 16kA
- Vn= 400 Vac - 6 modules

Technical features

Protection index	IP20
Max section	50/70mmq
Height	83mm
Width	106.8mm
Depth	76mm
N° of modules	6
Standard reference	CEI EN 60947-2
N° of poles	4P
Ultimate breaking capacity Icu	16kA
Rated voltage	400Vac
Type of magnetic curve	C
Rated current	125A
Series	Btdin

Documentation

-  [Instructions Sheet](#)
-  [DWG drawing](#)
-  [Catalogue BTDIN](#)

Related products



G43XF125

Earth leakage module
4P - type F - In= 125A -
Idn= 30mA - Vn= 400
Vac



G43XAC125

Earth leakage module
4P - type AC - In= 125A
- Idn= 30mA - Vn= 400
Vac



G47XF125

Earth leakage module
4P - type F - In= 125A -
Vn= 400 Vac - time and
current setting



G44XAC125

Earth leakage module
4P - type AC - In= 125A
- Idn= 300mA - Vn= 400
Vac